



Office: 432.652.3172  
 Fax: 432.652.3173

After Hours: 432.556.0200  
 Email: info@wmoil.net

# 5K DRILLABLE BRIDGE PLUG

The **5K Bridge Plug** is specifically designed to provide a low cost, medium performance plug to temporarily or permanently abandon a well bore. Other zone isolation applications for the 5K Bridge Plug includes testing, cementing, or stimulating. The 5K Bridge Plug can be set on wireline.

**Features:**

- Cost effective & dependable
- Nitrile elastomer element system
- Top equalizing
- Materials are compatible with P-110 casing
- Quick and easy drill-up
- Compatible with standard wireline pressure setting tools or many hydraulic setting tools
- Optimal: Mule Shoe

**Applications:**

- Squeeze cementing
- Fracturing
- Temporary or permanent plug and abandonment




OD <i>IN</i>	Max. ID <i>IN</i>	Casing		Weight <i>LBS/FT</i>	Tool OD <i>IN</i>
		Min. ID <i>IN</i>			
3-1/2	3.068	2.992		5.75 - 10.3	2.76
4-1/2	4.090	3.820		9.5 - 15.1	3.61
5	4.560	4.276		11.5 - 18	3.93
5-1/2	5.044	4.670		13 - 23	4.31
6-5/8	6.130	5.580		17 - 34.5	5.38
7	6.530	6.000		17 - 35	5.69
7	6.800	6.330		17 - 24	6.00
7-5/8				33.7 - 47.1	
7-5/8	7.250	6.620		20 - 39	6.31
8-5/8	8.090	7.430		24 - 52	7.12
9-5/8	9.060	8.370		29.3 - 61.1	8.12



Office: 432.652.3172  
 Fax: 432.652.3173

After Hours: 432.556.0200  
 Email: info@wmoil.net

# 5K DRILLABLE BRIDGE PLUG CONT.

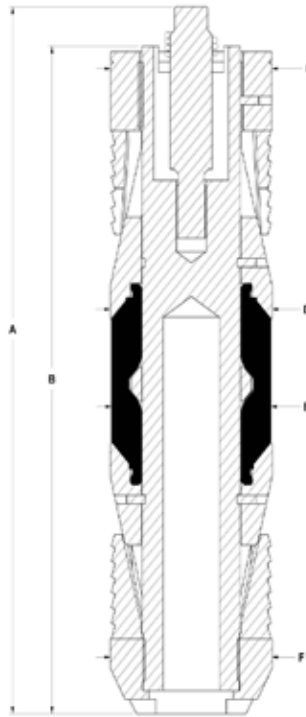

## BRIDGE PLUG LENGTHS AND DIAMETERS

SIZE	A	B	C	D	E	F
3-1/2	19.55	11.99	2.75	2.75	2.70	2.75
4-1/2	18.17	11.75	3.61	3.43	3.52	3.60
5	21.17	15.12	3.94	3.93	3.90	3.94
5-1/2	15.44	14.56	4.29	4.31	4.25	4.31
6-5/8	18.51	17.92	5.38	5.38	5.25	5.38
7	18.77	18.05	5.69	5.69	5.62	5.69
7-5/8	18.47	17.87	6.31	6.31	6.25	6.31
8-5/8	19.57	18.95	7.12	7.12	7.13	7.12
9-5/8	19.45	18.87	8.12	8.12	8.12	8.12